


ADA HEELPROOF Ductile iron longitudinal grating

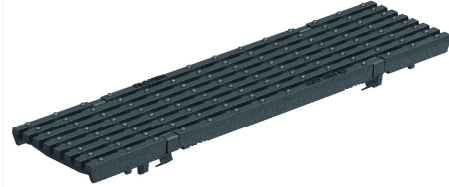

Product Features:

- Certified to EN 1433 Load Class C 250 kN 56,200 lbs.
- Uses fiX self-locking system.
- Suitable to use with NW100 channels.
- Manufactured from ductile iron.
- Complies with ADA - American Disabilities Act.

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings FILCOTEN® pro – v 100 (4") with fiX self-locking system.

Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight Lbs	Weight Kg	Inlet cross-section sq.inches	Inlet cross-section cm2/m
17010106	ADA HEELPROOF ductile iron longitudinal grating	ductile iron	19.70"/4.80"/0.78" 500/122/20	C 250 kN	Mesh 1.14" by 0.24" (29x6 mm)	7.94	3.6	49.6	320

Specification: FILCOTEN pro-tec NW100, heavy duty, (Load Class C 250 kN), ductile iron, reinforced grate is 4.80" (122mm) wide, 19.70" (500mm) long, 0.78" (20mm) high, weighing 7.94 lbs (3.6 kg). The grate has 1.14" (29mm) wide, 0.24" (6mm) long mesh, and is ADA compliant and Class C load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. Ductile iron manufactured and tested according to EN1433 - CE certified.

C250kN MW29/6: GJS 17010106

